

## PROGRAMMING INSTRUCTIONS


### UV SENSOR MODE - UVC / CDS SETTING



**WL7 FW Water Purification Systems** contain exclusive patented Firewall technology to guarantee the safest water possible. The sensor of the Firewall system can be used in UVC or CDS mode. The USA **WL7 FW** is equipped with a UVC Sensor and the default UV Sensor Position is UVC.

Dip Switch Pair 6 (DP6) located on the main PCB controls UV Sensor function and the position are shown below:

### WL7 MAIN PCB DIP SWITCHES

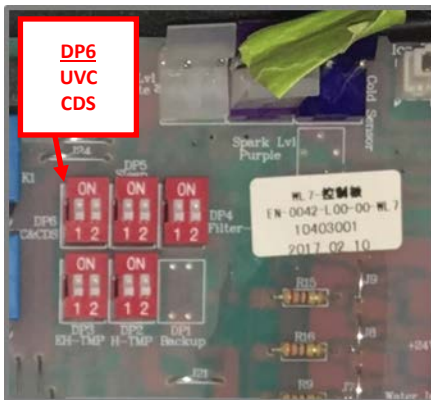

SHOWN IN DEFAULT POSITION  
BOTH SWITCHES 1&2 OFF (DOWN)

### UVC = DEFAULT



1 OFF  
2 OFF

### CDS



1 OFF  
2 ON

The status of the UV Sensor is displayed in the maintenance screen as shown below:

### UV SENSOR MODE STATUS

### WL7 MAINTENANCE SCREEN



Enter maintenance screen by selecting ambient and tapping dispense 5 times in 5 seconds.

**ENTER**  
Select Ambient  
Tap Dispense 5 Times