

MODEL/PART DESIGNATIONS


BRAND NAME	DESCRIPTION	MODEL - PART NUMBER
<i>P2 Classe</i>	<i>P2 Classe</i> – Cold, Cold Sparkling	CLASSE P2
	F-P2FX-M-CS-IB-SB-WLU	
	Serial Number: TP2C425SBXXX	

SPECIFICATIONS

<u>ITEM</u>	<u>P2 CLASSE</u>
Water Connection	1/4" Quick Connect
Cold Water Temperature	Cold Water Temperature – Factory Set Point 5°C (41°F)
Sparkling Tank Capacity	1 Liter
Ice Bath Capacity	21 Liters
Recommended Service Pressure	43-60 psi (275-414 kPa) – Use Pressure Regulator
Recommended CO ₂ Service Pressure	50-60 psi (345-414 kPa) – Use Pressure Regulator
Rated Service Flow - Cold	2.0-3.0 Liters per Minute (0.5-0.8 Gallons per minute)
Rated Service Flow - Sparkling	2.5-3.5 Liters per Minute (0.6-0.9 Gallons per minute)
Environmental Temperature	16° - 32°C (60° - 90°F)
UV Lamp (per Firewall)	15 W
Refrigerant Gas	R134a, 110g, 3.88 ounces
R134a Pressures	High (230 psi), Low (90 psi)

SHIPPING SPECIFICATIONS

<u>ITEM</u>	<u>WHL2 Classe</u>
Width/Depth/Height	401mm(W) x 590mm(D) x 550mm(H) 15.79" x 23.25" x 21.65"
Width/Depth/Height w/ Wheels	401mm(W) x 590mm(D) x 607mm(H) 15.79" x 23.25" x 23.9"
Weight (dry)	48 kg (106 pounds)

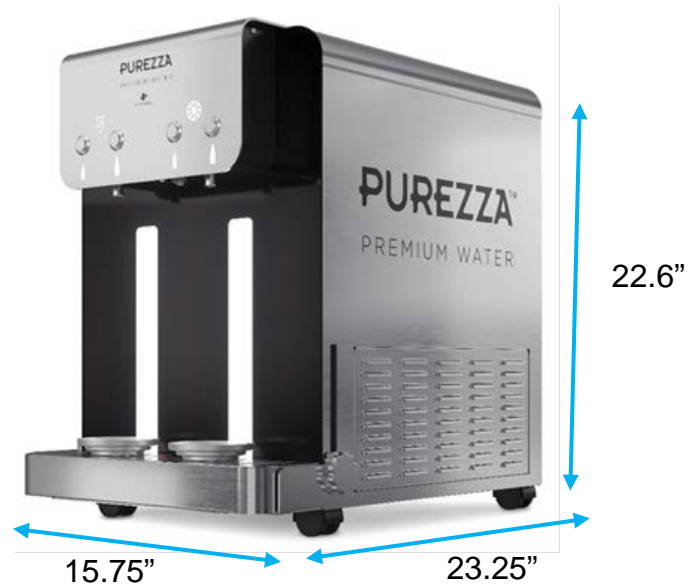

ELECTRICAL SPECIFICATIONS

ELECTRICAL SUPPLY	120V/60Hz	15 Amp Service
COMPONENT	POWER (approximate)	AMP DRAW (approximate)
Pump	267w	2A
Fan	45w	0.5A
Mixing Motor	25w	0.3A
Control Power	30w	0.2A
Compressor	220w	2A
UV Lamp System	15w	0.6A
P2 Classe TOTAL	617w	5.6A